

THREE PHASE LOW VOLTAGE HYBRID INVERTER

MKL-HY-T3-15K-LV

15kW | 48V Low Voltage | Three Phase

MKL-HY-T3-15K-LV is a hybrid solar inverter for residential and commercial energy storage applications. It supports self-consumption, backup power, battery charging and intelligent energy management.

KEY HIGHLIGHTS

- **Rated Power:** 15kW
- **Battery:** 48V Low Voltage
- **Phase:** Three Phase
- **Protection:** IP66
- **MPPT:** 2 MPPT
- **Monitoring:** WiFi / 4G optional

FEATURES


| | | |
|--|---------------------------------------|-------------------------------------|
| Pure Sine Wave Stable output | High PV Input Wide PV range | Multi MPPT Flexible array |
| Smart EMS Energy management | Battery Ready BMS support | Remote Monitor WiFi / 4G |

CERTIFICATIONS


- CE
- IEC 62109
- IEC 61000
- EN 50549
- RoHS



PRODUCT CHARACTERISTICS

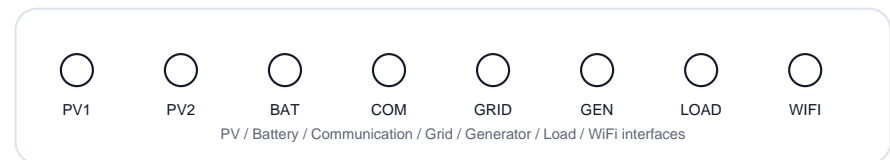

LCD DISPLAY ICONS

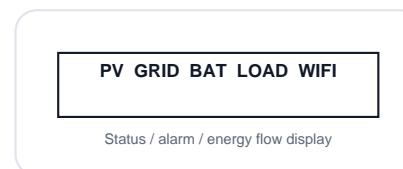

BASIC SYSTEM ARCHITECTURE



Technical Specifications - Battery & PV Data

MKL-HY-T3-15K-LV

| Model and Battery Input Data | |
|--------------------------------------|---|
| Model | MKL-HY-T3-15K-LV |
| Product Series | Three Phase Low Voltage Hybrid Inverter |
| Rated Power | 15kW |
| Battery Platform | 48V Low Voltage |
| Phase / Grid Type | Three Phase |
| Battery Type | Lead-acid or Lithium-ion |
| Battery Voltage Range | 40-60V |
| Rated Battery Voltage | 48Vdc |
| Max. Charging Current | 280A |
| Max. Discharging Current | 280A |
| Charging Strategy for Li-ion Battery | Self-adaption to BMS |
| PV String Input Data | |
| Max. PV Access Power | 30000W |
| Max. PV Input Power | 24000W |
| Max. PV Input Voltage | 800V |
| Start-up Voltage | 160V |
| PV Input Voltage Range | 160-800V |
| MPPT Voltage Range | 200-650V |
| Rated PV Input Voltage | 550V |
| Max. Operating PV Input Current | 26+26A |
| Max. Input Short-circuit Current | 39+39A |
| No. of MPP Trackers | 2 MPPT |

Technical Specifications - AC & Efficiency Data

MKL-HY-T3-15K-LV

| AC Input / Output Data | |
|--------------------------------------|--------------------------------|
| Rated AC Input / Output Active Power | 15000W |
| Max. AC Apparent Power | 16500VA |
| Peak Power (off-grid) | 2 times of rated power, 10s |
| Rated AC Input / Output Current | 21.7A |
| Max. AC Input / Output Current | 23.8A |
| Max. Continuous AC Passthrough | 80A |
| Rated Input / Output Voltage | 3L/N/PE 220/380Vac, 230/400Vac |
| Grid Connection Form | Three phase |
| Rated Grid Frequency / Range | 50Hz/45-55Hz, 60Hz/55-65Hz |
| Power Factor Adjustment Range | 0.8 leading to 0.8 lagging |
| Total Harmonic Distortion (THDi) | <3% of nominal power |
| DC Injection Current | <0.5% In |
| Efficiency Data | |
| Max. Efficiency | 97.6% |
| Euro Efficiency | 96.5% |
| MPPT Efficiency | >99% |
| Battery Charge Efficiency | 97.0% |
| Battery Discharge Efficiency | 96.5% |

Technical Specifications - Protection & General Data

MKL-HY-T3-15K-LV

| Equipment Protection | |
|--------------------------------------|--------------------------------------|
| DC Polarity Reverse Protection | Yes |
| PV Input Reverse Polarity Protection | Yes |
| AC Output Overcurrent Protection | Yes |
| AC Output Overvoltage Protection | Yes |
| AC Output Short-circuit Protection | Yes |
| Thermal Protection | Yes |
| DC Insulation Monitoring | Yes |
| Ground Fault Monitoring | Yes |
| Island Protection Monitoring | Yes |
| Residual Current Detection | Yes |
| Arc Fault Circuit Interrupter (AFCI) | Optional |
| Surge Protection Level | Type II (DC) / Type II (AC) |
| Interface and General Data | |
| Display | LCD + LED |
| Communication Interface | RS232 / RS485 / CAN |
| Monitor Mode | WiFi / Bluetooth / 4G / LAN optional |
| Generator Input / Smart Load | Supported by configuration |
| Parallel Operation | Up to 10 units |
| Operating Temperature Range | -40C to +60C, derating above 45C |
| Permissible Humidity | 0-100%, non-condensing |
| Ingress Protection Rating | IP66 |
| Installation | Wall-mounted |
| Cooling | Intelligent air cooling |
| Dimensions (W x H x D) | 456 x 566 x 255 mm |
| Weight | 30kg |
| Warranty | 5 years standard, 10 years optional |

Contact & Support

 Email: info@moonkiel.com

WhatsApp: +86 13373650207 / +86 13812131613

No.1719-8, Huishan Avenue, Wuxi City, Jiangsu Province, China